



C.B.S.E. SCHOOL (AFFI NO. 1030989)

SHREE RAJ RAJENDRA JAYANTSEN VIDYAPEETH

RUN BY-RAJ RAJENDRA SHIKSHAN SAMITI, KHACHROD



📍 JAORA ROAD, KHACHROD, DIST. UJJAIN (M.P.) 📞 9406930552

16/04/2026

Respected Sir,


The school has installed the fire Safety Gadget with a cost of around 4 to 6 Lakhs last year itself. The Certificate to be received soon. The person incharge has sent the Application No AB-2600000466 and will be received soon.

So kindly accept this letter as an acknowledgement for fire NOC.

Yours Sincerely

Mrs. Veena Kundi

Shree Raj Rajendra Jayantsen Vidyapeeth

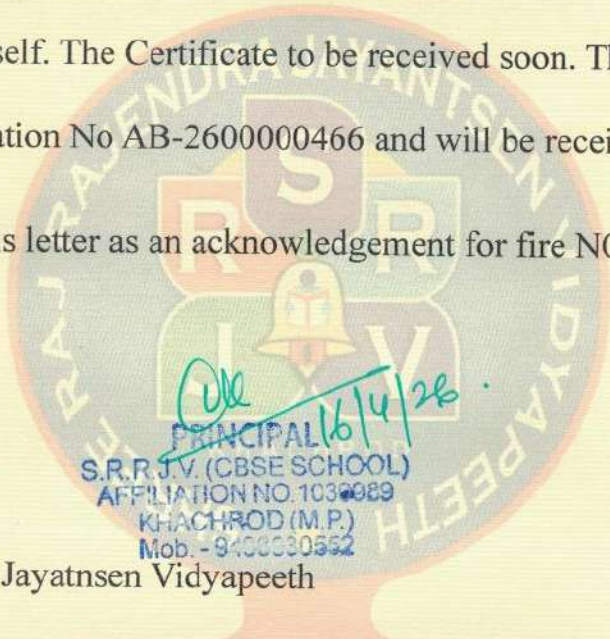

PRINCIPAL
S.R.R.J.V. (CBSE SCHOOL)
AFFILIATION NO. 1030989
KHACHROD (M.P.)
Mob. - 9406930552

C.B.S.E. AFFI NO.
1030989





Panel containing a red fire alarm device and a terminal block with three circuit breakers.

FIRE ALARM
AGNI

Terminal block with three circuit breakers and colored wiring (blue, yellow, red).

Main red electrical control panel with various indicators and meters.

Indicators: Red, Yellow, Blue, Green, White, and another Green.

Meters: Ammeter (A) and Voltmeter (V).

Emergency stop button (red with yellow label).

Locking mechanism (black handle).

Red emergency stop button.

IN CASE OF FIRE
AGNI

White electrical outlet panel with two sockets.



FIRE ALARM PANEL

- MAINS ON
- SYS. ON
- CHG. ON
- LOW BATT
- SILENCE
- FAULT
- FIRE

- ON
- OPEN
- SHORT
- FIRE

- RESET
- LAMP
- SILENCE
- ALARM

AGNI

AGNI KAVACH SYSTEM



IN CASE OF FIRE

AGNI

PRESS
HERE

RESET



FIRE EXTINGUISHER
DRY CHEMICAL POWDER
STORED PRESSURE TYPE

(ए.बी.सी. सुखा पाउडर वाले अग्निसामक यंत्र)

CLASS OF FIRE

A

TYPE 'A' FOR USE ON PAPER, WOOD, CLOTHS & PLASTIC ETC.
कागज़, लकड़ी एवं कपड़े इत्यादि की आग के लिए

B

TYPE 'B' FOR USE ON PETROL, OIL, PAINTS, SPIRIT & CHEMICALS ETC.
पेट्रोल, तेल, रंगकर्म एवं रासायनिक की आग के लिए

C

TYPE 'C' FOR USE ON FLAMMABLE GASES & ELECTRIC FIRES.
ज्वलनशील गैस और बिजली की आग के लिए

FIRE

IN CASE OF FIRE CALL ON EMERGENCY No. 101, 112

HOW TO OPERATE



1. HOLD THE EXTINGUISHER UPRIGHT
2. REMOVE SEAL AND PULL PIN
3. SQUEEZE LEVER AND DIRECT THE JET TOWARD THE BASE OF THE FIRE
4. SWEEP FROM SIDE TO SIDE
5. AIM THE FIRE TOWARD THE BASE OF THE FLAMES ARE EXTINGUISHED

प्रयोग का तरीका

उपरोक्त चित्र के लिए ध्यान रखें कि जब तक प्रयोग करने की आवश्यकता है तब तक खोलने से बचें। खोलने के बाद तुरंत आग के आधार पर उपरोक्त चरणों का पालन करें।

RECHARGE AFTER EVERY USE. SEND FOR REFILLING AFTER USE. CARE AND MAINTENANCE. CHECK PRESSURE GUAGE PERIODICALLY AND DURING RECHARGE. PRESSURE DROPS. NEEDLE WILL SHIFT INTO THE RED ZONE. STOP CHECKING.

DO NOT USE WATER FOR CLEANING. DO NOT REPLY ON PARTIALLY USED OR RECHARGED EXTINGUISHER. TESTED TO 2500 PSI (175 BAR) PRESSURE. MAX CHARGING PRESSURE IS 15.5 BAR (225 PSI). SPECIFICATION IS 15000. FOR SAFETY FACTORY PERFORMANCE MAINTAINING EXTINGUISHERS TO BE SUITABLE TEMPERATURES - 000 TO 5000.

Contain ABC DRY POWDER CAPACITY 4L